


Compensator TYPE KP04

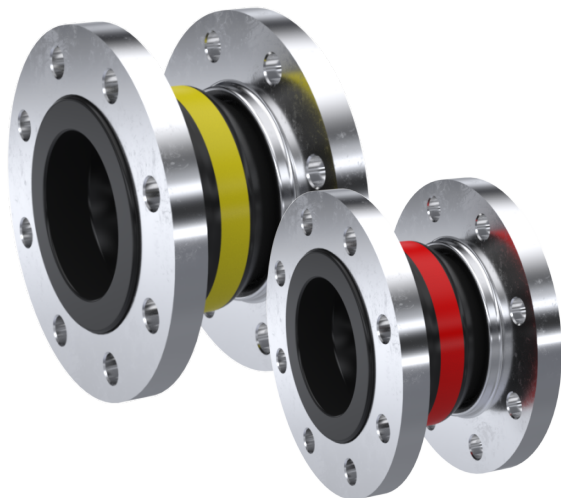

description:

A compensator is always used when vibrations in a system have to be absorbed.

product features:

- Suitable for liquid and gaseous media
- DVGW-G and DVGW-T approval
- electrically conductive
- Compensation of alignment errors, compensation of assembly inaccuracies
- rotating flanges in steel or stainless steel
- OPTIONAL with vacuum support ring

connection:
DN25 – DN300

construction:
straight form

pressure:
0 – 16 bar – depending on the version

type: Compensator with rubber sleeve
connection: Flange DIN EN 1092-1
flange material: Stainless steel (up to 1.4571, above 1.4541) and steel (galvanized) 235JR
cuff: execution 00 EPDM -40°C up to +100°C (briefly until 120°C)
 execution 01 NBR -20°C up to +90°C (briefly until +100 C°)
pressure: PN16
approvals: EPDM – DVGW Drinking water W270 and ACS
 NBR – DVGW Gas G260 for temperatures from -20°C to +70°C

Temperature-dependent pressure and movement areas: EPDM / NBR




operating temperature max.	range of motion max.	Temperature-dependent operating pressure for bellows	
		PN10	PN16
50°C	100%	10 bar	16 bar
70°C	80%	8 bar	12 bar
100°C	60%	6 bar	10 bar

possible uses:

EPDM	Water, drinking water, cold and warm service water. Sea water, cooling water, weak acids and bases, salt solutions, technical alcohols, esters and ketones
NBR	Mineral oil products, fuel-ethanol mixtures and DIN EN fuels, city and natural gas (NO LPG!)

Construction of rubber bellows:

	EPDM	NBR
inner layer:	Butyl (IIR)/ EPDM, seamless, low-diffusion	NBR (Nitril), seamless, abrasion resistant
pressure carrier:	PA textile cord, butyl-rubberized	PA textile cord
outer layer:	EPDM, ozone resistant, heat resistant	Chloroprene CR
Labelling	red ring	yellow ring



Dimensions:

			bellows		Permissible movement recording nominal				Permissible negative pressure (vacuum stability)		
nominal size		length	nominal pressure	effective cross cut	axial ⁴		lateral	angular	without VSD	with VSD ²	with VSD+S ³
DN		BL	PN	Ae	Δxc	Δxe	Δy	Δycc			
mm	in	mm	Bar	cm ²	mm	mm	mm	Degree	mbar	mbar	mbar
25 ¹	1"	130	16	15	-30	+20	±30	±30	Max. 1000	max. -1000	max. -1000
32	1 ¼"	130	16	15	-30	+20	±30	±30			
40	1 ½"	130	16	20	-30	+20	±30	±30			
50	2"	130	16	30	-30	+20	±30	±30			
65	2 ½"	130	16	50	-30	+20	±30	±30	-700		
80	3"	130	16	85	-30	+20	±30	±30	-600		
100	4"	130	16	125	-30	+20	±30	±20	-400		
125	5"	130	16	185	-30	+20	±30	±20	-300		
150	6"	130	16	250	-30	+20	±30	±20	-300		
200	8"	130	16	400	-25	+30	±30	±10	-300		
250	10"	130	16	600	-10	+30	±15	±5	-200		
300	12"	130	16	800	-10	+30	±15	±5	-100		

- 1) Bellows DN32 are used for rubber compensators DN25
- 2) VSD... vacuum support ring made of material 1.4571
- 3) VSD+S... vacuum support ring with lock (screw connection) made of 1.4571
- 4) Axial movement absorption Δx_c = compression and Δx_e = expansion

flange dimensions:

		flange					
nominal size DN		Outside- diam .	Drilling pattern according to EN 1092	bolt circle diameter	number of holes	hole diameter	Weight
mm	in	D	PN	Lk	n	L	G
		mm	-	mm	-	Mm	kg
25	1"	115	40	85	4	14	1,9
32	1 ¼"	140	40	100	4	18	3,4
40	1 ½"	150	40	110	4	18	4,0
50	2"	165	16	125	4	18	4,6
65	2 ½"	185	16	145	4	18	5,3
80	3"	200	16	160	8	18	6,9
100	4"	220	16	180	8	18	8,0
125	5"	250	16	210	8	18	9,9
150	6"	285	16	240	8	22	12,3
200	8"	340	10	295	8	22	16,5
250	10"	395	10	350	12	22	21,6
300	12"	445	10	400	12	22	29,3

Adjustment forces:

Axially:

DN	Adjustment forces (Average values from full way)					
	0 bar	2,5 bar	4 bar	6 bar	10 bar	16 bar
20	31	68	128	192	243	270
25	31	68	128	192	243	270
32	31	68	128	192	243	270
40	30	66	124	186	236	261
50	25	51	98	134	173	192
65	24	53	100	150	190	211
80	28	58	104	148	185	205
100	35	71	116	206	274	304
125	36	71	137	214	282	313
150	49	102	189	293	390	433
200	100	180	365	568	735	816
250	105	207	388	609	778	864
300	123	248	448	658	883	980

Attention: Deviations (+/-25%) of the adjustment forces may occur due to material and insert changes as well as manufacturing processes.

Laterally:

DN	Adjustment forces (Average values from full way)					
	0 bar	2,5 bar	4 bar	6 bar	10 bar	16 bar
20	64	125	184	240	240	300
25	64	125	184	240	240	300
32	64	125	184	240	240	300
40	62	121	178	233	256	291
50	50	65	80	105	145	205
65	40	78	115	150	165	188
80	35	74	136	155	173	200
100	55	88	143	168	192	228
125	100	200	261	293	383	518
150	120	260	309	366	466	616
200	323	723	836	949	1219	1624
250	379	806	1022	1173	1479	1938
300	392	837	1068	1216	1542	2031

Attention: Deviations (+/-25%) of the adjustment forces may occur due to material and insert changes as well as manufacturing processes.

option (on request):

- Other lengths on request
- vacuum support rings
- PTFE lining
- Tension / tension rod length limiter
- joint tension
- guiding scopes
- flame retardant sleeves
- ground cover hoods
- Other flange standards and dimensions

item number:

type	connection	bellows	size
KP04	00 – steel 01 – stainless steel	00 – EPDM 01 – NBR	05 – DN25
			06 – DN32
			07 – DN40
			08 – DN50
			09 – DN65
			10 – DN80
			11 – DN100
			12 – DN125
			13 – DN150
			14 – DN200
			15 – DN250
			16 – DN300

Example Nr. KP04000010:

KP04 | 00 | 00 | 10

Compensator with steel flange and EPDM sleeve

Connection: Steel flange DIN EN 1902-1 PN16

Cuff: EPDM

Size: DN80

Illustration similar, subject to technical and dimensional changes.