

Float valve stainless steel TYPE SW04



description:

Float valves are used for the filling or the regulation of fluid levels of storage tanks. The fluid level can be regulated exactly through the moving of the float on the float arm.

features:

- suitable for aggressive waters and other aggressive fluids
- replaceable valve seat and piston
- high flow-rate

dimension:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2" inch

construction:

closed design

working pressure:

0 – 12 bar

design:

connection:

body:

seal:

inner parts:

float arm:

control piston:

float:

temperature:

working pressure:

float valve with connection for immersion tube

male thread ISO 228

stainless steel 1.4408

FPM

stainless steel 1.4404

stainless steel 1.4571


stainless steel 1.4404

stainless steel

max. 190°C


max. 12 bar

dimensions:

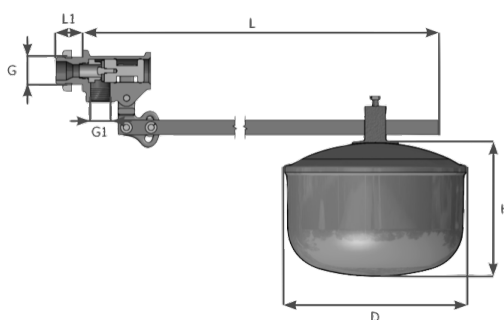

diameter	connection	exit	L	L1	H	D	Kvs	weight	weight
DN	G in inch	G1 in inch	mm	mm	mm	mm	m3/h	valve kg	float kg
15	1/2"	3/8"	607	20	90	179	3,0	0,8	0,62
20	3/4"	1/2"	607	25	107	246	4,4	0,8	0,90
25	1"	3/4"	728	28	200	200	7,7	1,1	1,18
32	1 1/4"	1 1/2"	805	39	180	240	14	3,3	1,6
40	1 1/2"	1 1/2"	805	44	240	240	22	3,4	1,47
50	2"	1 1/2"	51	91	50	285	23	3,7	2,34
65	2 1/2"	1 1/2"	56	106	50	260	24	4,9	2,91

Flow diagram:

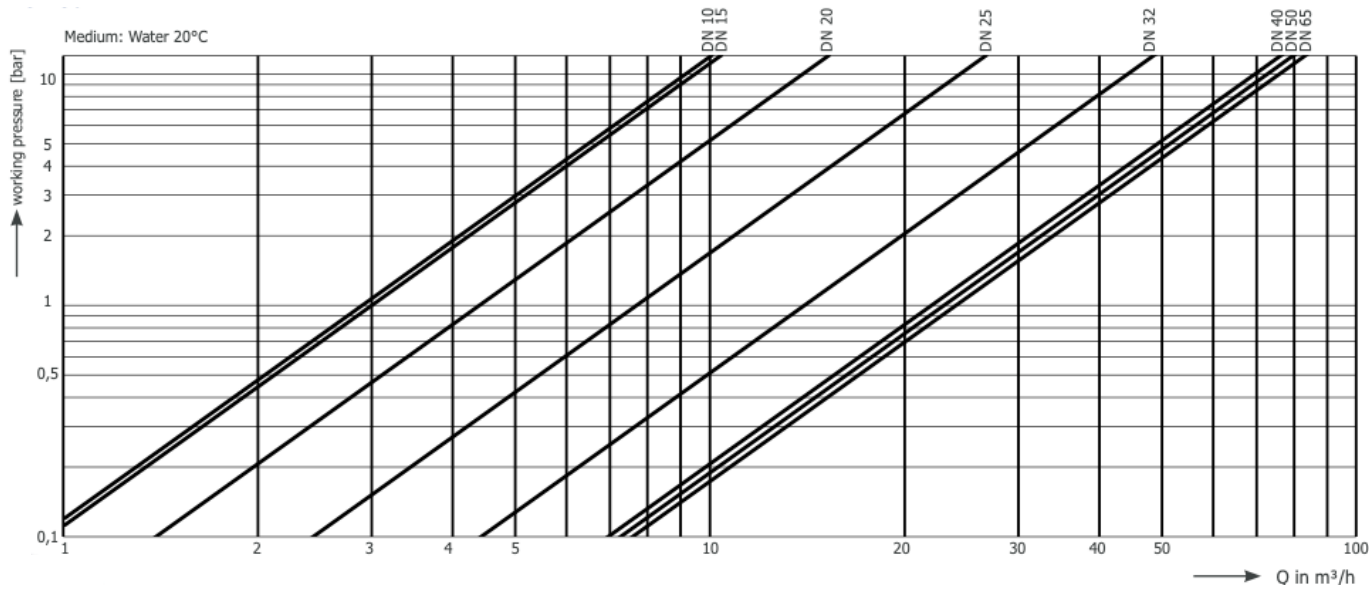

article number:

Type	Body	Float	size
SW04	00 – stainless steel	01 - stainless steel	03 – 1/2" 04 – 3/4" 05 – 1" 06 – 1 1/4" 07 – 1 1/2" 08 – 2" 09 – 2 1/2"

Example no. SW04000104:
SW04

00

01

04

Float valve type SW04

stainless steel body
stainless steel float
size 3/4" inch

Image similiar, subject change without notice.