


3/2-ways solenoid valve brass type MV08

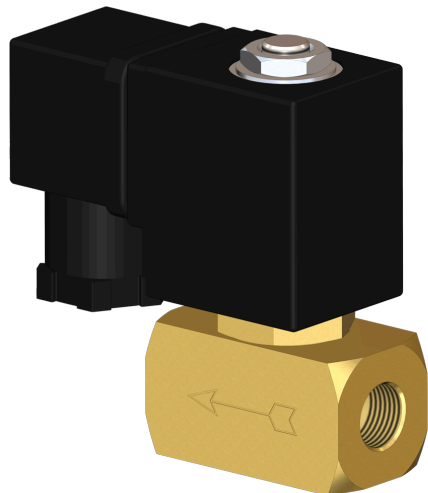

description:

3/2-way solenoid valve made of brass, very compact design for high flow rates. Ideal for machine and plant engineering.

product features:

- suitable for **liquid & gaseous media**
- mounting position: any

connection:

1/4" inch

control:

direct acting

function:

NC – normally closed

pressure:

0 – 20 bar – depending on design

design:

seat valve

diameter:

DN 1,0 / DN 1,5 / DN 2,0 / DN 2,5

body material:

brass

seal:

FKM, EPDM

voltage:

230V 50Hz 24V DC

voltage tolerance:

+/- 10% acc. VDE 0580

power consumption:

230V 50Hz: 15 VA
24V DC 18 Watt

duty:

100 % ED

plug socket:

IP65 is plug socket mounted acc. DIN EN 175301-803 Form A

temperature:

ambient: max. + 50°C
media: FKM – 10°C up to 120°C
 EPDM -10°C up to 120°C

DN

1,0 mm
1,5 mm
2,0 mm
2,5 mm

max. pressure

0 – 20 bar
0 – 15 bar
0 – 10 bar
0 – 6 bar

connection

G 1/4" inch
G 1/4" inch
G 1/4" inch
G 1/4" inch


flow rate

0,7 l/min
1,3 l/min
2,3 l/min
3,0 l/min

options:

free of oil and fat
plug socket mounted with LED

dimensions:

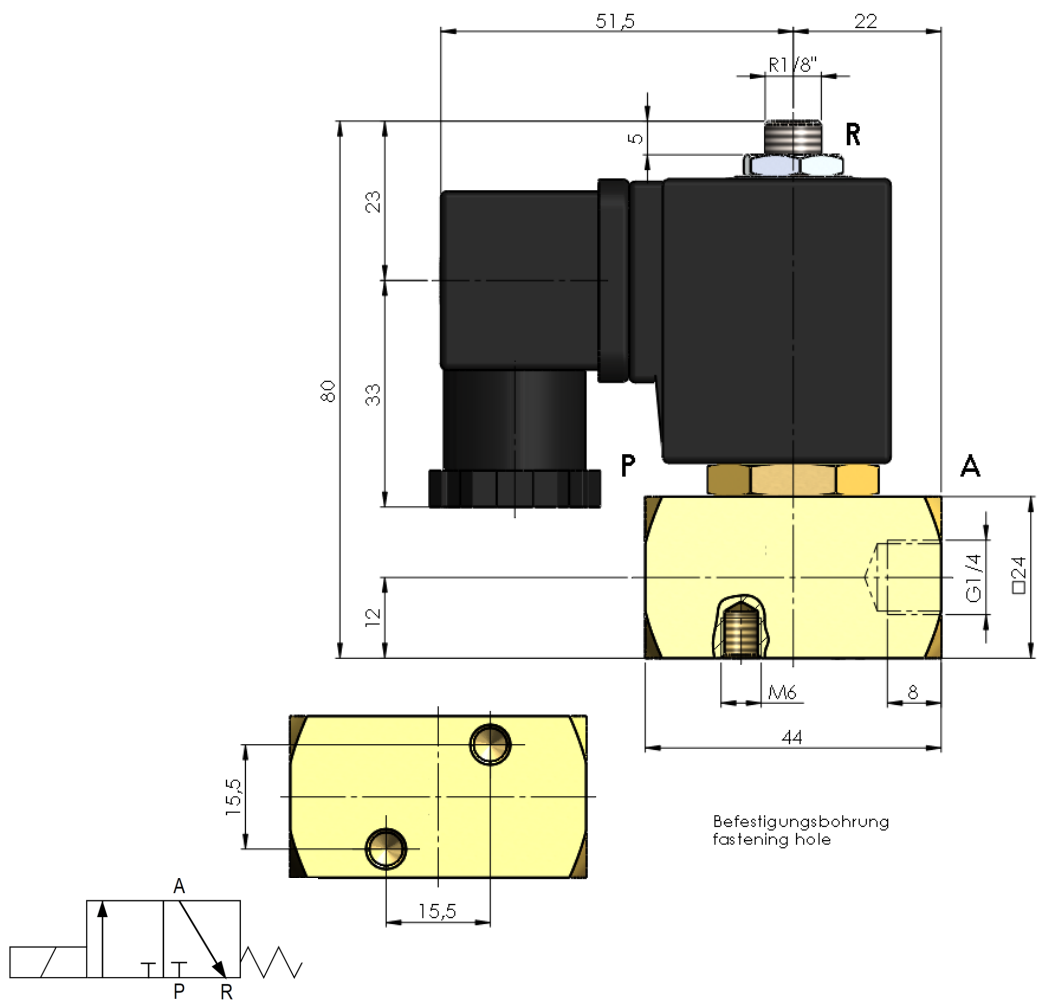

article number:

Type	Voltage	Seal	Function	Version	Size
MV08	1 – 230V 50Hz 2 – 24V DC	1 – EPDM 2 – FKM	0 – NC normally closed	0 – standard	10 – DN 1,0 15 – DN 1,5 20 – DN 2,0 25 – DN 2,5

Example no. MV08120020:

MV08	1	2	0	0	20
------	---	---	---	---	----

3/2 way solenoid valve
Voltage: 230V 50Hz
Seal: FKM
Function: NC normally closed
Version: standard
Size: DN 2,0

Image similar, subject change without notice.